



NS Series is a universal tent designed to perform various tasks that require isolation from negative weather conditions. It is suitable to be operated in varied terrain and climate, including high air humidity and high insolation (range of external temperature -30°C to $+50^{\circ}\text{C}$).

Due to the ability of modular connection, the tent may be used both as a single unit or as an element of larger structures, e.g. command post, field hospital, warehouse etc. The use of a connector allows for connection of multiple tents, in longitudinal manner or in a row, forming a single structure.

PARAMETER	NS-18	NS-26	NS-30
HEIGHT [m]	2,30 – 2,50	2,30 – 2,50	2,30 – 2,50
WIDTH [m]	4,80	4,80	4,80
LENGTH [m]	3,42	5,20	5,95
USABLE AREA [m ²]	16,50	25,00	28,50
WEIGHT [kg] $\pm 10\%$	215	240	265
SETUP TIME [min]	15	20	25
HANDLING [persons]	4	4	4
ACCOMMODATION	4 – 6	6 – 8	8 – 10

This document is the property of Lubawa SA Ostrów Wielkopolski. It is protected by the copyright and may not be reproduced or used in any manner whatsoever without the express written permission of the owner.





NS SERIES


Description:

- The shape of the frame (half-cylinder), along with the installation system used employing shock absorbers, reduces the effect of negative weather conditions.
- The frame is made in quick-deployment variant, thus minimizing the time necessary to deploy the tent.
- The dome is made of fire-resistant polyester fabric, in BERBERYS camouflage, with one-sided coating of neoprene/hypalon mixture, with aluminum paste (ensures thermal and light reflex – improves the efficiency of lighting and heater/air conditioner).
- The fabric provides camouflage in visible light and near-infrared light.
- The floor is fixed to the dome; it is made of polyester fabric, with double-sided coating of polyvinyl chloridebased mixture. The tent can be equipped with additional floor, providing the desired properties, e.g. antielectrostatic effect, easy clean-up of body fluids, oil or oil-related fluids.
- Internal lining, mounted to outer dome, is made of ripstop fire-resistant fabric. The fabric has certificate of approval from the National Institute of Hygiene.
- The flysheet is made of a fabric identical to the fabric of the dome. It can be rolled up and hung up at the sides.

The tent is designed to be used 24 hours a day. It can be deployed in the open air and transported with various means of transportation. The materials used for the tent are resistant to corrosive environmental factors (sunlight, humidity), mould, fungus, and destructive ageing processes.

Optional accessories that improve the functionality of the tent:

- Internal and external lighting
- Rigid floor
- Air conditioner
- Other – according to customer's guidelines.

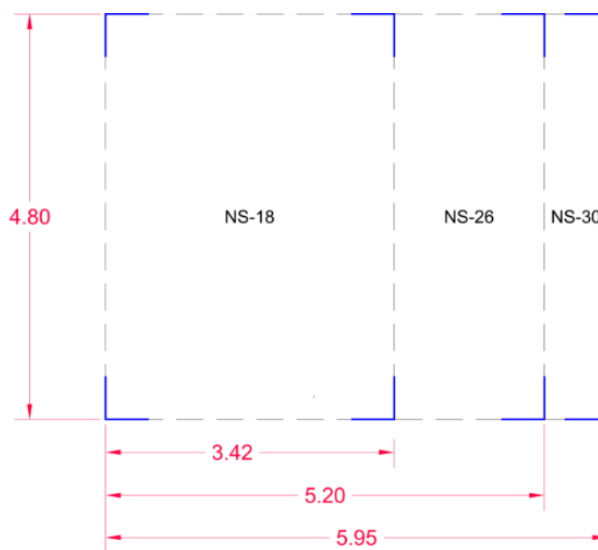

This document is the property of Lubawa SA Ostrów Wielkopolski. It is protected by the copyright and may not be reproduced or used in any manner whatsoever without the express written permission of the owner.